




**100 mm x 140 mm x 20 mm NTN 6920LLU
deep groove ball bearings**

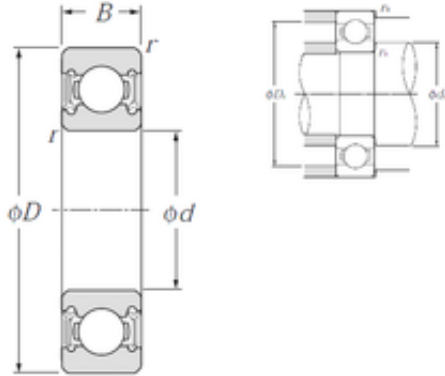

Bearing No. 6920LLU

6920LLU Bearing 2D drawings and 3D CAD models

Size	100x140x20 mm
Bore Diameter	100 mm
Outer Diameter	140 mm
Width	20 mm
d	100 mm
D	140 mm
B	20 mm
C	20 mm
r min.	1,1 mm
da min.	106,5 mm
da max	110 mm
Da max.	133,5 mm
ra max.	1 mm
Weight	0,785 Kg
Basic dynamic load rating (C)	41 kN
Basic static load rating (C0)	39,5 kN
Reference speed	2 600 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
EAN	0692314677926
Weight / US pound	1.755
Product Group	B00308
Enclosure	2 Seals



Y.S INTERNATIONAL IMPORT&EXPORT CO., ...

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	100MM Bore; 140MM Outside Diameter; 20MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	1.73
Bore	3.937 Inch 100 Millimeter
Outer Race Width	0.787 Inch 20 Millimeter
Outside Diameter	5.512 Inch 140 Millimeter
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	100 mm



Y.S INTERNATIONAL IMPORT&EXPORT CO., ...

precision rating:	ISO Class 0
outside diameter:	140 mm
finish/coating:	Uncoated
overall width:	20 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	20 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	20 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	2600 rpm
internal clearance:	CN
fillet radius:	1.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	5300 RPM
dynamic load capacity:	41000 N
series:	69
static load capacity:	39500 N
manufacturer product page:	Click here